


## HIGH PRECISION DIGITAL COUNTER

Model No.		JSK-2D 2 DIGITAL COUNTER	JSK-3D 3 DIGITAL COUNTER
Classification			
Appearance			
Dimensions		FIG. 5	
Mounting		Flush mounting: Socket base <a href="#">P3G08</a> or <a href="#">US08</a>	
Features		Error-free digital setting and LED display power off reset or Auto reset 0.5S(upon customer's request) External connector: Could be proximity sensor or photoelectric sensor	
Input		Counting speed: 30 cps max Counting input: By short-circuiting Counting input is effective 0.2S after power on	
Output Capacity 7A		SPDT	
Rated Voltage		50/60HZ 12VDC, 24VAC/DC, 110VAC, 220VAC, (Range: 85% - 110%)	
L I F E	Mechanical	10,000,000 Times	
	Electrical AC220VPF=1	500,000 Times	
A C C U R A N C Y	Repeat	0	
	Setting	0	
	Voltage	0	
	Temperature	0	
Reset time		0.1 Sec Max	
Ambient temp. & Humidity		-10~55Deg.C, 85% Max	

## CONNECTION DIAGRAM & TIMING CHART

OUTPUT : SPDT (Delay contact 1C)


INPUT :

- 1) Contact pin#1 & pin#3
- 2) Connected with proximity sensor or photoelectric sensor :

NPN TYPE ----- + --> Connected to pin#4

Proximity sensor or ----- OUTPUT --> Connected to pin#3

Photoelectric sensor ----- - --> Connected to pin#1

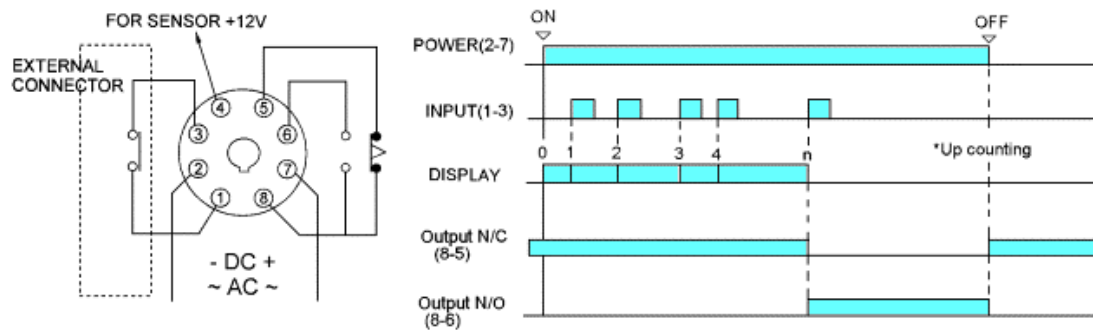

## ORDERING CODE

