



TERMINAL BLOCK



QUALITY IS OUR BEST POLICY





























TERMINAL BLOCK




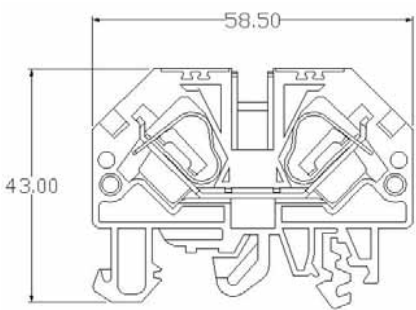
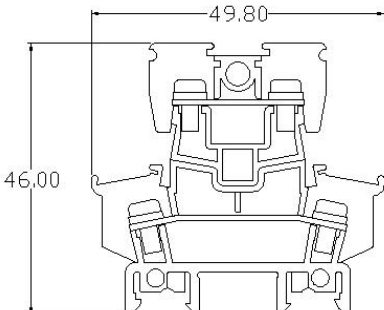
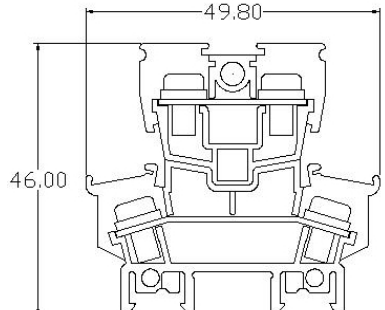







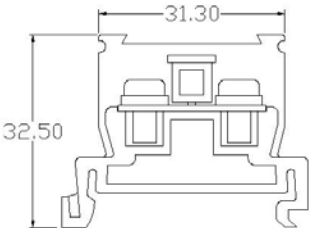
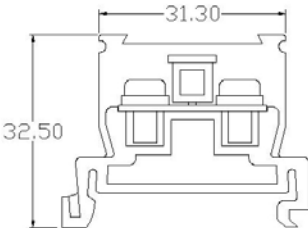
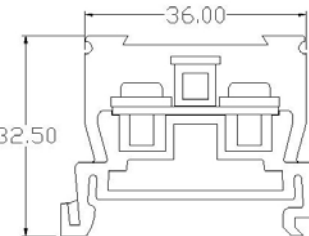
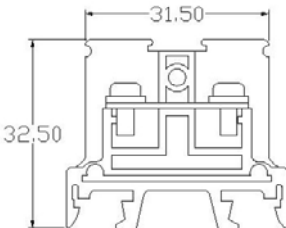
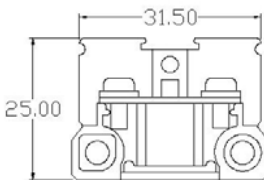
QUALITY IS OUR BEST POLICY


























Feed-Through Terminals Screw clamp connection Material : PA66 Rail mount on TS32/TS35 or direct mounting	HT-2.5	HT-4	HT-10	HT-16	HT-35	HT-50	HT-95							
														
														
Q'ty.P.pck(g/pcs)	1320/200	1100/100	1630/100	1480/50	1156/20	114/1	180/1							
Terminal width/Insulation stripping length	5.1mm/7mm	6.2mm/11.5mm	8.4mm/12mm	12.3mm/15mm	16.2mm/18mm	20.3mm/27mm	25.5mm/30mm							
Conductor cross-section solid/stranded	0.2-4/0.2-2.5	0.2-6/0.2-4	0.2-10/0.2-10	2.5-25/2.5-16	2.5-50/2.5-35	16-50/25-50	35-95/35-95							
AWG	22-12	22-10	22-8	12.6	12-2	1/0-6	4/0-2							
Electrical ratings	Voltage V	Current A	Voltage V	Current A	Voltage V	Current A	Voltage V	Current A	Voltage V	Current A				
VDE	750	26	750	34	750	55	750	75	750	135	1000	168	1000	250
CSA	600	26	600	30	600	50	600	70	600	100	600	150	600	230
UL	600	20	600	30	600	50	600	70	600	115	600	150	600	230
End Plate	EP-4	EP-4	EP-4	EP-16	EP-35	-	-							
Color	Grey, Pear	Grey, Pear	Grey, Pear	Grey, Pear	Grey, Pear	Grey, Pear	Grey, Pear							
Approvals	UL	UL	UL	UL	UL	UL	UL							

Earth-Through Terminals Screw clamp connection Material : PA66 Rail mount on TS35	HT-4E	HT-10E	HT-16E	HT-35E	Fuse Terminals Screw clamp connection Material : PA66 Rail mount on TS32/TS35 or direct mounting	HTF-1	HTF-1/LED
							
							
Q'ty.P.pck(g/pcs)	1540/50	1680/50	1072/20	2020/20	Q'ty. P. pck (g/pcs)	1240/100	1340/100
Terminal width/Insulation stripping length	9mm/11.5mm	10.4mm/12mm	12mm/12mm	16mm/18mm	Terminal width/Insulation stripping length	8mm/9mm	8mm/9mm
Conductor cross-section solid/stranded	0.2-6/0.2-4	0.2-10/0.2-10	2.5-25/2.5-16	2.5-50/2.5-35	Conductor cross-section solid/stranded	0.2-4/0.2-2.5	0.2-4/0.2-2.5
AWG	22-10	20-6	10-4	10-2	AWG	22-12	22-12
Rated surge voltage	8kv	8kv	12kv	12kv	Electrical ratings	Voltage V	Current A
Contamination class	3	3	3	3	VDE	500	10
Electrical ratings	Voltage V	Current A	Voltage V	Current A	CSA	250	10
UL	600	30	600	70	UL	250	10
End Plate	-	-	-	-	End Plate	EPF-1	EPF-1
Color	Green/Yellow	Green/Yellow	Green/Yellow	Green/Yellow	Color	Grey, Pear	Grey, Pear
Approvals	UL	UL	UL	UL	Approvals	-	-

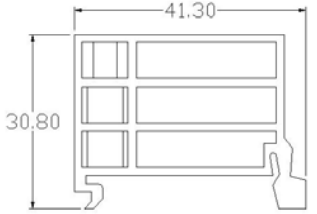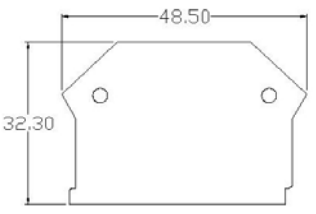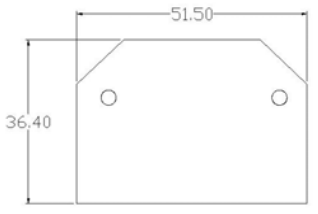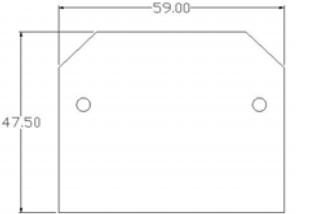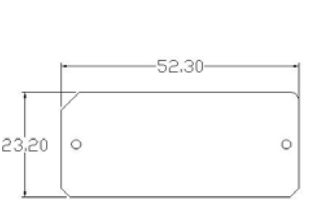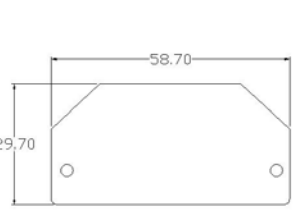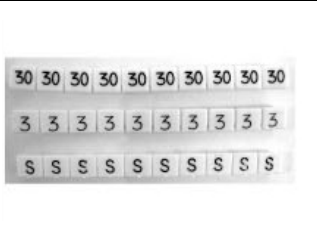


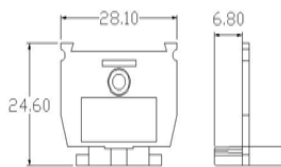
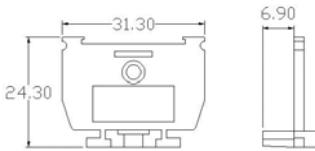
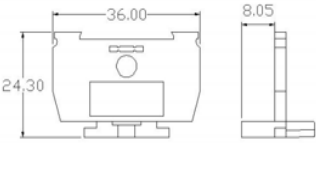
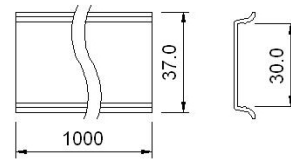
Feed –Through Terminals Spring clamp connection Material : PA66 Rail mount on TS32/TS35 or direct mounting	HTP-4	Feed –Through Terminals Screw clamp connection Material : PC Rail mount on TS15/TS35 or direct mounting	MEC-15	MEC-25
				
				
Qty. p. pck (g/pcs)	1140/100	Qty. p. pck (g/pcs)	1100/100	1730/100
Terminal width	6.2mm/11.5mm	Terminal width	7mm	9.8mm
Heat deflection °C	0.2-6/0.2-4	Heat deflection °C	130 °C	130 °C
AWG	22-10	AWG	22-16	22-12
Electrical ratings	Voltage V Current A	Electrical ratings	Voltage V Current A	Voltage V Current A
VDE	750 34	VDE	600 15	600 25
CSA	600 30	CSA	600 15	600 25
UL	600 30	UL	600 15	600 25
End plate	EPP-4	End plate	MEC-15-02/02L/02R	MEC-15-02/02L/02R
Color	Grey, Pear	Color	Black	Black
Approvals	UL	Approvals	UL , CE	CE



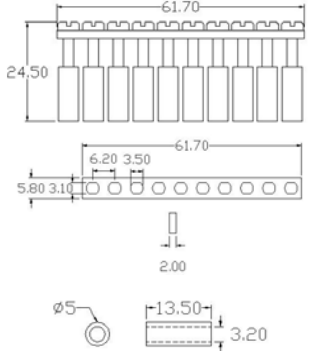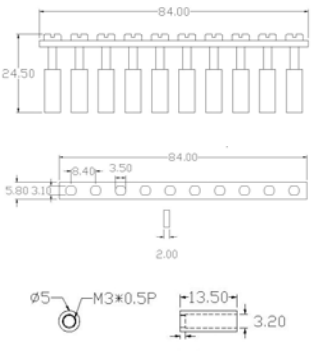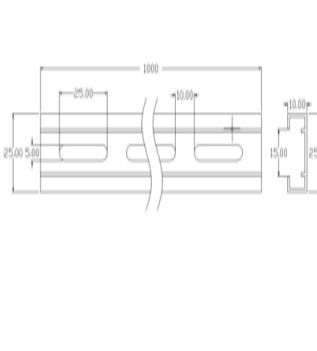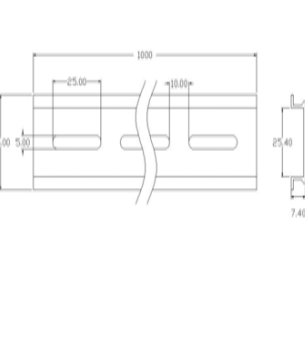




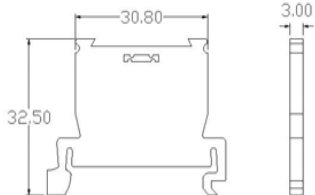
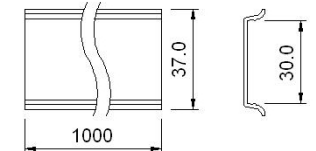
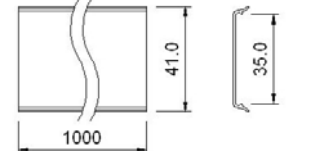
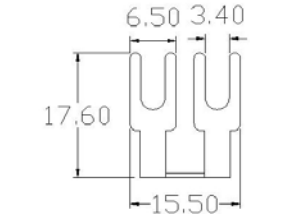
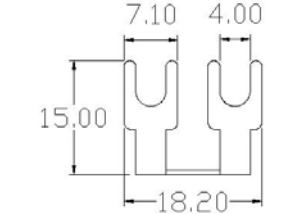
Feed –Through Terminals Screws clamp connection Material : PC Rail mount on TS35	NHT-10	NHT-20	NHT-30	MN-15	MB-15
					
					
Qty. p. pck (g/pcs)	760/100	1060/100	1400/100	710/100	1360/200
Terminal width	9mm	10.6mm	13.2mm	7mm	7mm
Heat deflection °C	130°C	130°C	130°C	130°C	130°C
AWG	22-16	22-14	22-12	22-16	22-16
Electrical ratings	Voltage V Current A	Voltage V Current A	Voltage V Current A	Voltage V Current A	Voltage V Current A
CE	600 10	600 20	600 30	600 15	600 15
CSA	600 10	600 20	600 30	600 15	600 15
UL	600 10	600 20	600 30	600 15	600 15
End plate	NHT-10-02	NHT-10-02	NHT-10-02	MN-15	MB-15-02
Color	Black	Black	Black	Black	Black
Approvals	CE	CE	CE	-	-

Feed –Through Terminals Screws clamp connection Material : PC Rail mount on TS15	NHC-10	NHC-20	NHC-30	NHC-60
				
				
Qty. p. pck (g/pcs)	1140/20	1780/20	2360/30	35/1
Terminal width	8.5mm	10.8mm	13.2mm	20mm
Heat deflection °C	130°C	130°C	130°C	130°C
AWG	22-16	22-14	22-12	12-8
Electrical ratings	Voltage V Current A	Voltage V Current A	Voltage V Current A	Voltage V Current A
CE	600 10	600 20	600 30	600 60
CSA	600 10	600 20	600 30	600 60
UL	600 10	600 20	600 30	600 60
End plate	NHC-10-02	NHC-20-02	NHC-30-02	NHC-60-02
Color	Black	Black	Black	Black
Approvals	CE	CE	CE	CE






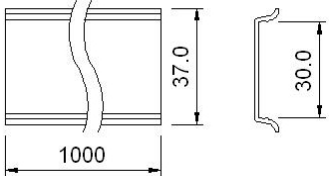
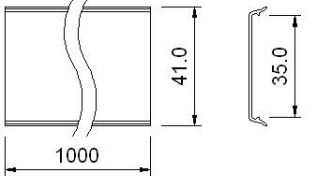
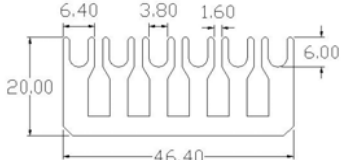
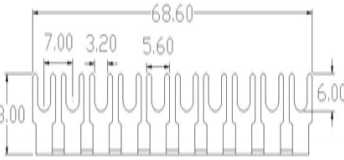
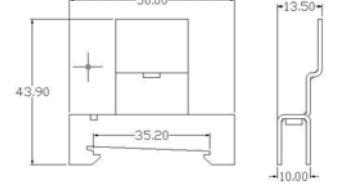
HT-5	EP-4	EP-16	EP-35	EPF-1	EPP-4
					
					
HT-4-01C	HT-4-01C	HT-4-47	HT-10-47	TS-15	TS-35
					
<p>A ~ Z</p> <p>+, -</p> <p></p>	<p>1 ~ 10</p> <p>to</p> <p>91 ~ 100</p>				













Assemblies

NHC-10-02	NHC-20-02	NHC-30-02	NHC-60-02	NHC-10-05	NHC-10-06
					
					

NHT-10-01C	NHT-10-02	NHT-10-53	NHT-30-53	12D-53	18D-53										
															
 <table data-bbox="71 1332 385 1380"><tr><td>Model No.</td><td>NHT-10-30</td><td>NHC-10</td><td>NHC-20</td><td>NHC-30</td></tr><tr><td>L (mm)</td><td>140</td><td>180</td><td>230</td><td>280</td></tr></table>	Model No.	NHT-10-30	NHC-10	NHC-20	NHC-30	L (mm)	140	180	230	280					
Model No.	NHT-10-30	NHC-10	NHC-20	NHC-30											
L (mm)	140	180	230	280											

Assemblies

NHT-10-06	NHT-30-06	MN-15-53	MEC-15-53	MEC-15-05
				
				

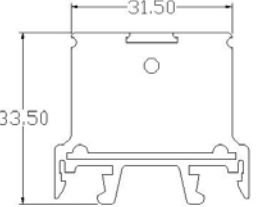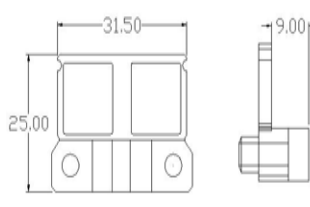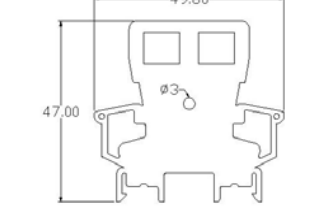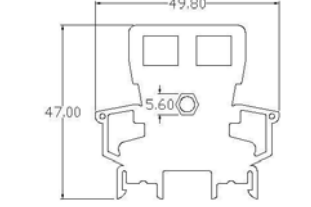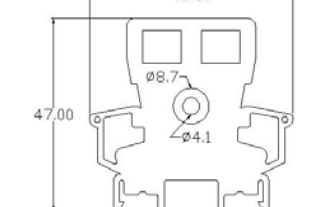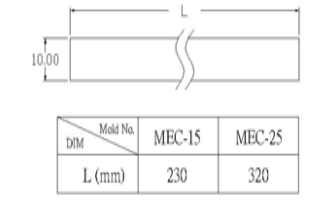MN-15-02	MB-15-02	MEC-15-02	MEC-15-02R	MEC-15-02L	MEC-15-01C						
											
					 <table><tr><td>Mold No.</td><td>MEC-15</td><td>MEC-25</td></tr><tr><td>L (mm)</td><td>230</td><td>320</td></tr></table>	Mold No.	MEC-15	MEC-25	L (mm)	230	320
Mold No.	MEC-15	MEC-25									
L (mm)	230	320									